

Technical data

Categories No: TNIMC2

Name: Industrial Grade -COOH Functionalized Multi-walled Carbon Nanotubes

Purity: >95%

OD: 8-15nm [OD=Outer Diameter]

ID: 3-6nm [ID=Inner Diameter]

Length: 30-50 μ m

SSA: 210-250m²/g


Tap Density: 0.168g/cm³

Color: Black


EC: >100s/cm [EC=Electric Conductivity]



Making method: CVD

Testing paper

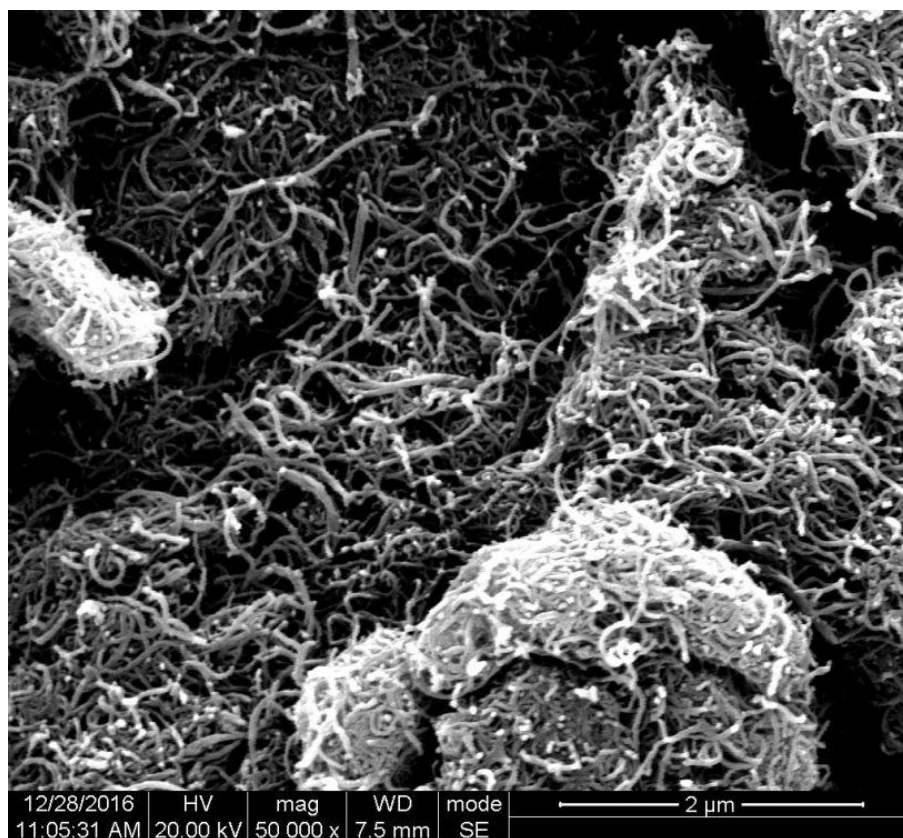

SEM

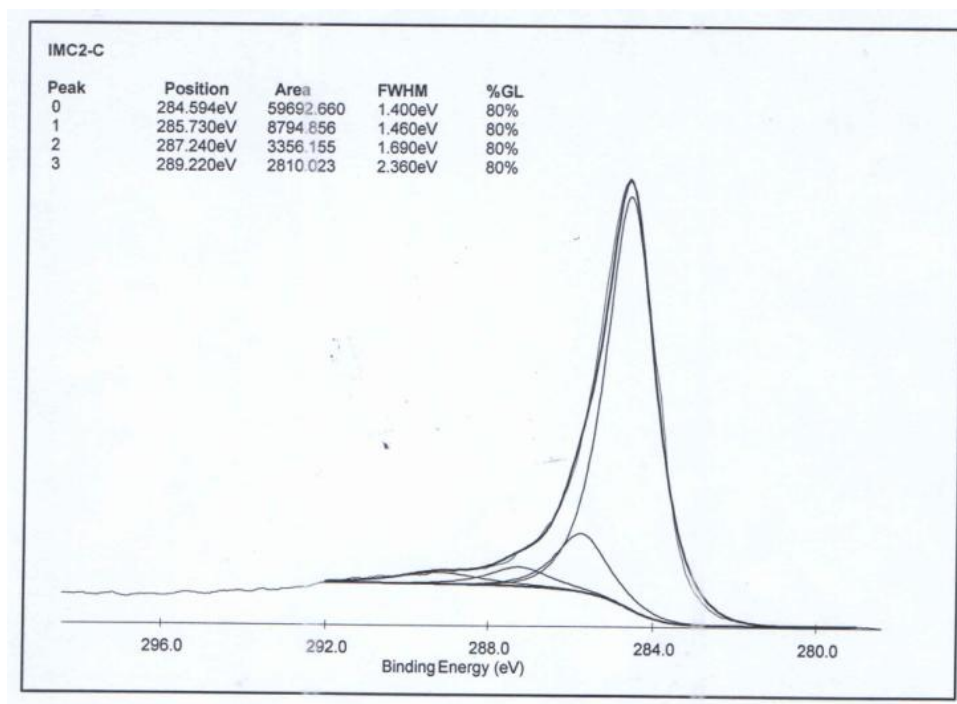

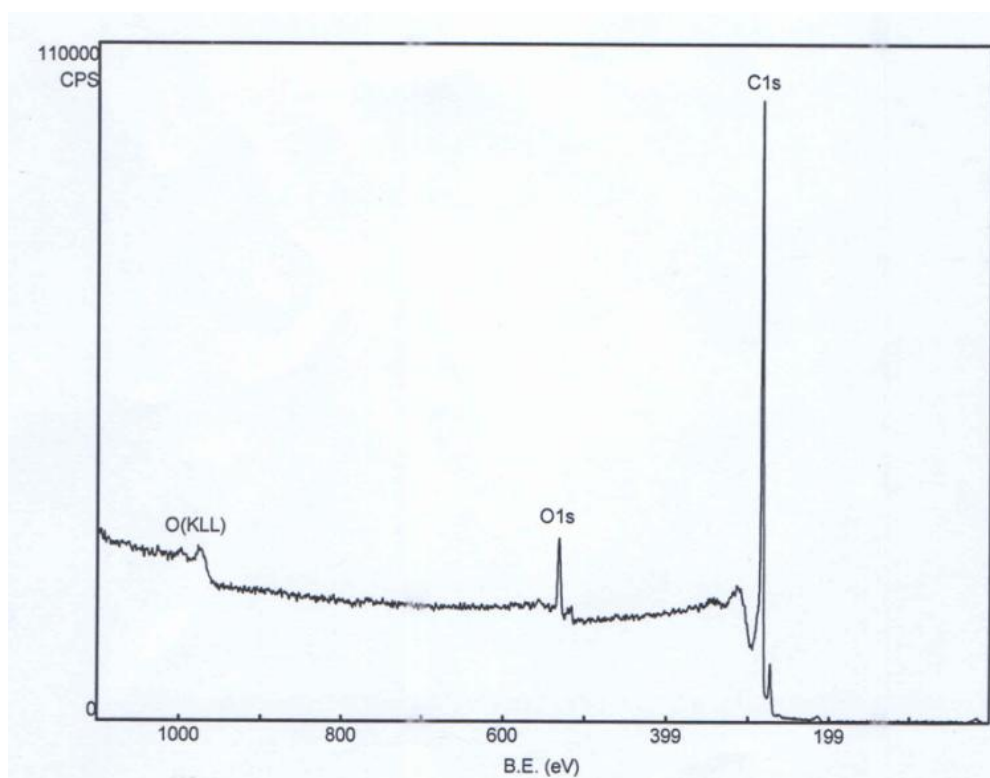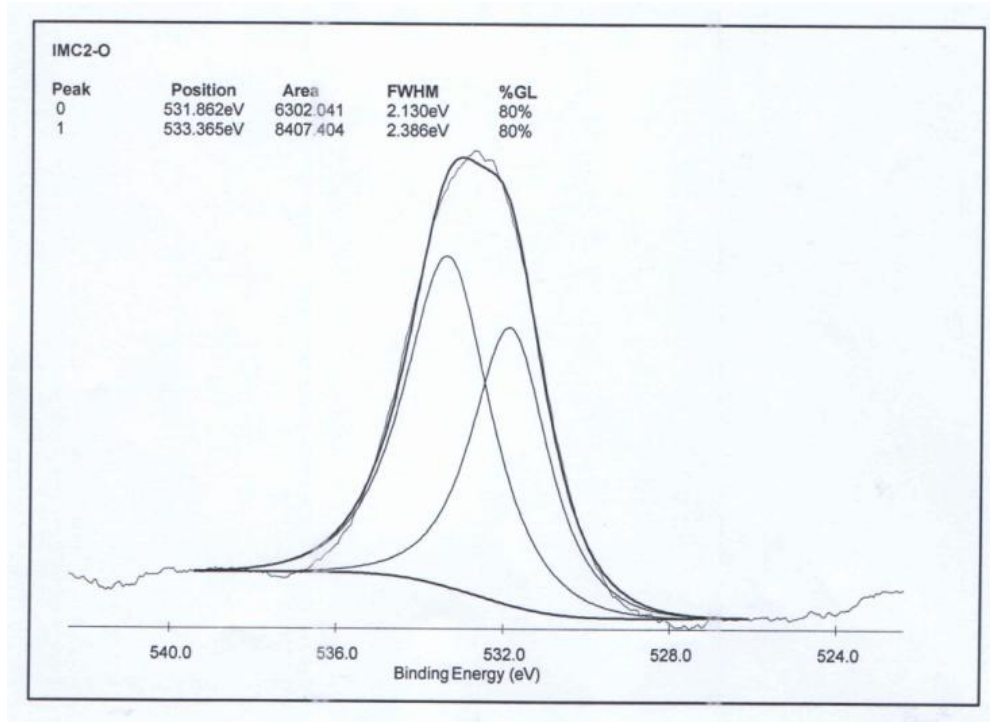

Components	Area(CPS)	Contents	Components
C	74653.8	0.25	93.05%
O	14709.4	0.66	6.95%

XPS

Application instruction

Potential Applications of Carbon Nanotubes

Additives in polymers

Catalysts

Electron field emitters for cathode ray lighting elements

flat panel display

gas-discharge tubes in telecom networks

Electromagnetic-wave absorption and shielding

Energy conversion

Lithium-battery anodes

Hydrogen storage

Nanotube composites (by filling or coating);

Nanoprobes for STM, AFM, and EFM tips

nanolithography

nanoelectrodes

drug delivery

sensors

Reinforcements in composites

Supercapacitor